



NLC Co., Ltd

# NT 40.5 Rod

## NT40.5 Rod


Developed mainly for soil investigation with a new concept.




### Features

- 1) Inside-upset structure eliminates couplings.
- 2) Minimum Rod I.D. is so large that it can prevent a loss of pressure in a Permeability Test or Grouting, and it is not necessary to prepare for other size of Rod.
- 3) Because the thread is tapered, it gives easy make-up and break-up, at the same time, the high sealing capability leads to no concern about water leakage.

### NT40.5 Rod

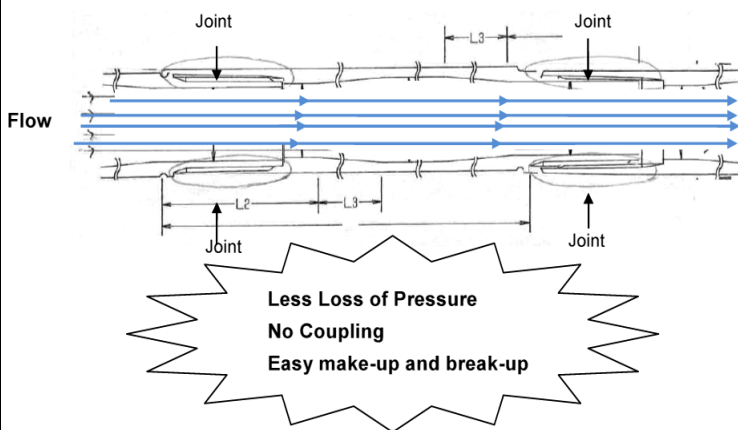

### Coupling Type Drill Rod

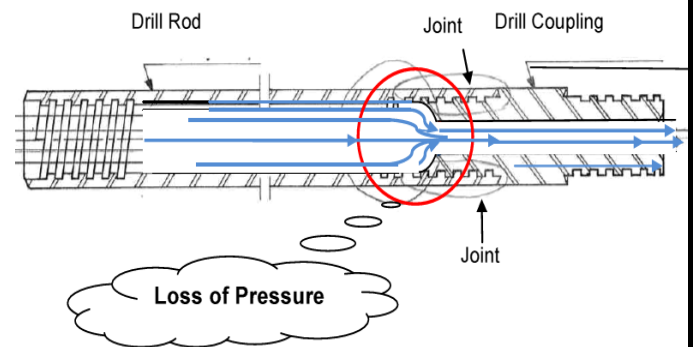

L1	3.0m, 1.5m
L2	100mm
L3	200mm
D1	40.5mm
D2	27.5mm
D3	31.5mm
Thread Type	Taper 3 Thr'd/inch
Weight	13kgf/3m, 7kgf/1.5m

